Capsuleline

Capsuleline 50W GY6.35 12V CL 4000h 1CT

Single-ended low-voltage halogen capsule giving crisp white halogen lightCompact shape, crisp white light Low-voltage halogen capsule. Ideal solution for small decorative luminaires. UV-block glass and low-pressure filling allow usage without cover glass. The compact Capsuleline delivers crisp white light over a long lifetime.

Product data

• General Characteristics

Philips Code	13102
Cap-Base	GY6.35
Cap-Base Information	15
Bulb	T4 [T4: .434 inch / 11mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Nominal Lifetime	4000 hr
Rated Lifetime (hours)	4000 hr
Rated Lifetime (years)	4 an

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	3000 K
Color Temperature Technical	3000 K
Luminous flux lamp	880 Lm
Rated Luminous Flux	880 Lm
Luminous Efficacy Lamp	17.2 Lm/W
LLMF - end nominal lifetime	80 (min) %

• Electrical Characteristics

Rated Wattage	50.0 W
Lamp Wattage	50 W
Lamp Wattage Technical	50.0 W
Power Factor	1 -
Voltage	12 V
Lamp Current	4.25 A
Dimmable	Yes
Starting Time	0.0 s
Warm-up Time to 60% Light Outp	instant full light

• Environmental Characteristics

Energy Efficiency Label (EEL)	C
Energy consumption kWh/1000h	53 kWh

• Measuring Conditions

Switching cycle	16000X

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions

Overall Length C	44 (max) mm
Diameter D	12 (max) mm
Overall Width E	12 (min) mm
Light Center Length L	30 mm
Overall Height H	44 (min) mm

• Product Data

Order code	924040217101
Full product code	924040217101
Full product name	Capsuleline 50W GY6.35 12V CL 4000h 1CT
Order product name	Caps 50W GY6.35 12V CL 4000h 1CT/10X10F

PHILIPS

Capsuleline

Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100
Bar code on pack - EAN1	8711500402172
Bar code on intermediate packing - EAN2	8711500416971
Bar code on outerbox - EAN3	8711500425737
Logistic code(s) - 12NC	924040217101
ILCOS code	HSG/C/UB-50-12-GY6.35
Net weight per piece	3.750 gr

Dimensional drawing

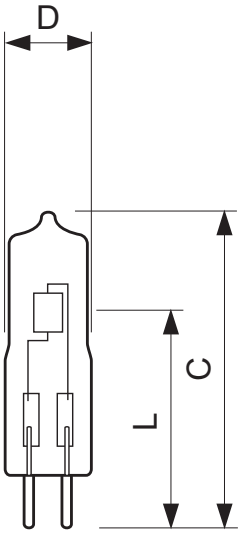

Capsuleline 50W GY6.35 12V CL 4000h 1CT

Product	C (Max)	D (Max)	L (Norm)
CAP SU 13102 50W GY6.35 12V CL	44	12	30

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, January 5
data subject to change